



Hydralift Mini (500 lbs / 225 kg)
installed with Sprinter frame brackets
(with no USA Trailer Hitch)

Sprinter Frame brackets


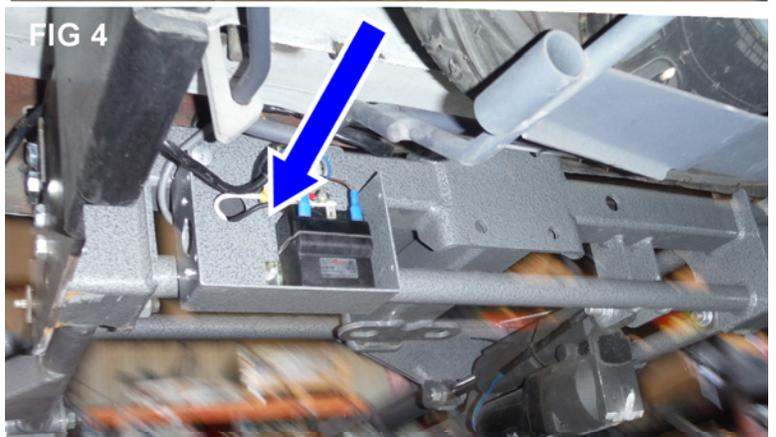


1. Sprinter Frame brackets, can be installed with or without the factory bumper.
2. Fig 2 uses the factory bumper bolts
3. photo Fig 3 shows installed & folded for storage
4. on this install the Electrical box is bolted behind the lift and not on top wit the electrical plug relocated.
5. The remote plug can be mounted anywhere, With the HL aluminum bumper the remote plug is bolted into bumper face.

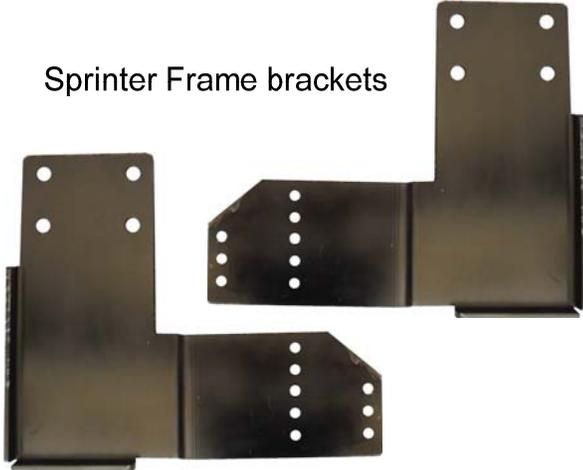



- 502474:
1. Standard receiver mount
 2. Single motorcycle
 3. On extruded aluminum platform 24x74 size

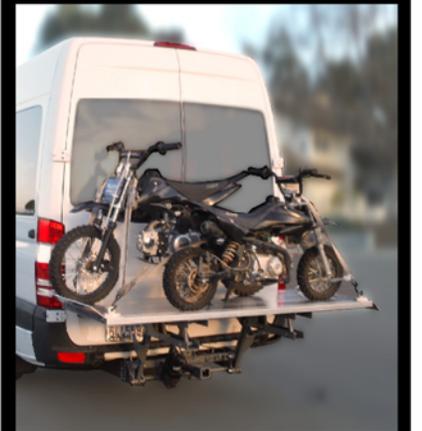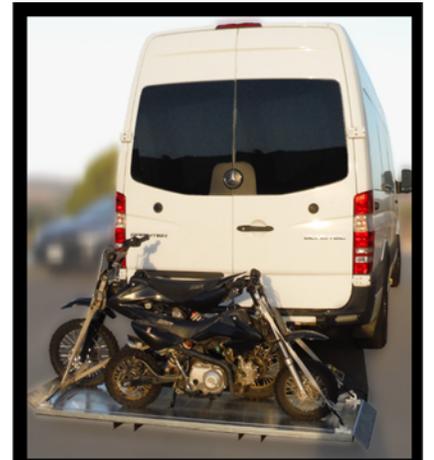

- 502474: new option
1. Frame mounts
 2. Single motorcycle
 3. On motorcycle ramp





